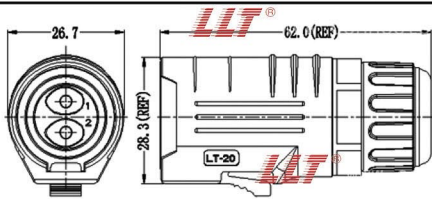
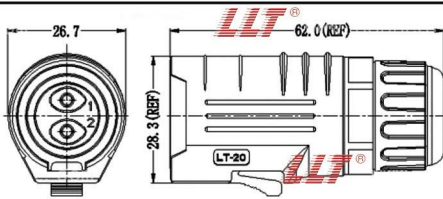


组装式法兰---Assembled Flange

96

LT20 Series Specifications

组装式插头---Assembled Plug

描述 Description	组装式插头(插针) Assembled Pulg(Plug)					组装式插头(插孔) Assembled Pulg(Socket)				
照片 Photo										
尺寸 Drawing										
料号 Part Number	芯数 Contact	料号 Part Number				芯数 Contact	料号 Part Number			
	2	LLT-LT20-C02PE-01-001				2	LLT-LT20-J02PE-01-001			
	3	LLT-LT20-C03PE-01-001				3	LLT-LT20-J03PE-01-001			
	4	LLT-LT20-C04PE-01-001				4	LLT-LT20-J04PE-01-001			
	5	LLT-LT20-C05PE-01-001				5	LLT-LT20-J05PE-01-001			
	6	LLT-LT20-C06PE-01-001				6	LLT-LT20-J06PE-01-001			
	7	LLT-LT20-C07PE-01-001				7	LLT-LT20-J07PE-01-001			
	8	LLT-LT20-C08PE-01-001				8	LLT-LT20-J08PE-01-001			
	9	LLT-LT20-C09PE-01-001				9	LLT-LT20-J09PE-01-001			
	10	LLT-LT20-C10PE-01-001				10	LLT-LT20-J10PE-01-001			
12	LLT-LT20-C12PE-01-001				12	LLT-LT20-J12PE-01-001				
芯数 Contacts Numbers	2	3	4	5	6	7	8	9	10	12
额定电压 Voltage Rating	500V				500V				400V	
额定电流 Current Rating	20A				12A				5A	
接触端子 Contact Terminal	φ2.7mm				φ1.8mm				φ1.0mm	
线材外径 Cable Range	8.0mm-13mm									
可插拔次数 Mechanical Life	1500 mating cycles									
工作温度 Operating Rating	-40℃ - +105℃									
防水等级 Waterproof Level	IP67									
五金排列 Pin Layout	          2 POS 3 POS 4 POS 5 POS 6 POS 7 POS 8 POS 9 POS 10 POS 12 POS									